

PRODUCT DATA

Piezoelectric Accelerometer Charge Accelerometer — Type 4370, 4370 S and 4370 V

FEATURES

- General purpose
- High sensitivity
- Low-level, low-frequency measurements

Description

Type 4370 is a piezoelectric, DeltaShear[®], Unigain[®] accelerometer with top connector. Type 4370 features 10–32 UNF receptacle for output connection and can be mounted on the object by means of a 10–32 UNF threaded steel stud.

Characteristics



This piezoelectric accelerometer may be treated as a charge source. Its sensitivity is expressed in terms of charge per unit acceleration (pC/g).

The DeltaShear design involves three piezoelectric elements and three masses arranged in a triangular configuration around a triangular centre post. The ring prestresses the piezoelectric elements to give a high degree of linearity. The charge is collected between the housing and the clamping ring. The piezoelectric element used is a PZ 23 lead zirconate titanate element. The housing material is stainless steel.



Calibration

The sensitivity given in the calibration chart has been measured at 159.2 Hz and an acceleration of 10 g. For 99.9% confidence level, the accuracy of the factory calibration is $\pm 2\%$.

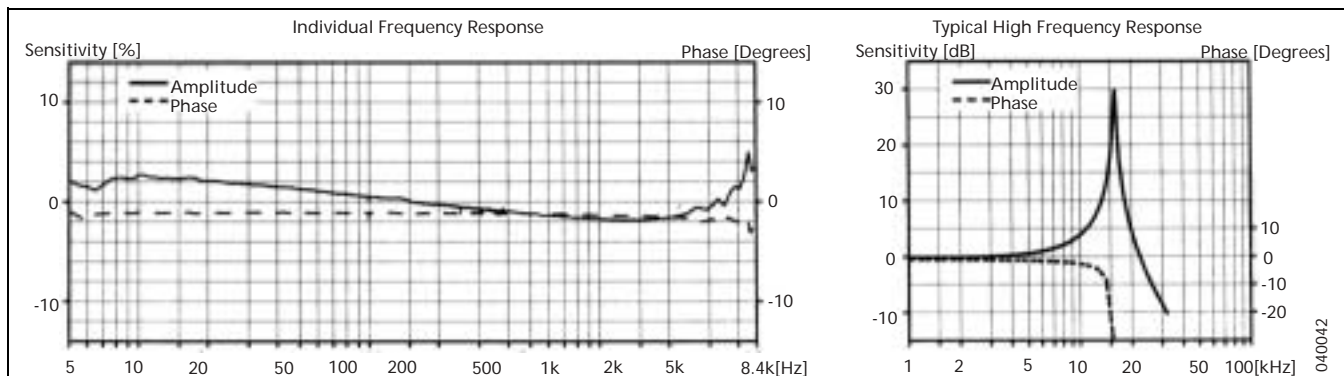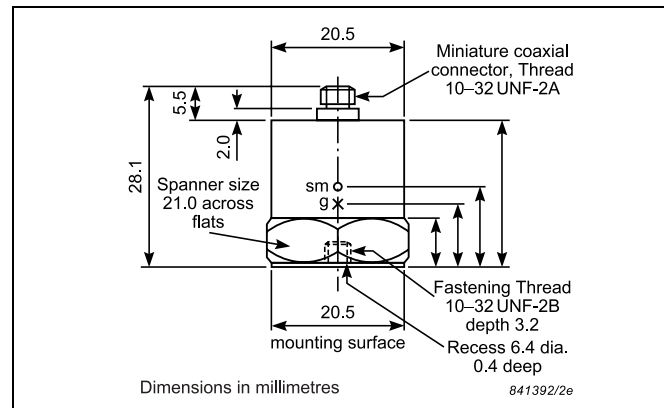

Specifications – Charge Accelerometer Type 4370, 4370 S and 4370 V

	Units	4370/4370 S	4370 V
Dynamic Characteristics			
Charge Sensitivity (@ 159.2 Hz)	pC/g	98 ± 2%	98 ± 15%
Frequency Response		See typical Amplitude Response	
Mounted Resonance Frequency	kHz	16	
Amplitude Response ±10% [1]	Hz	0.1 to 4800	
Transverse Sensitivity	%	<4	
Transverse Resonance Frequency	kHz	10	
Electrical Characteristics			
Min. Leakage Resistance @ 20°C	GΩ	≥20	
Capacitance	pF	1200	
Grounding		Signal ground connected to case	
Environmental Characteristics			
Temperature Range	°C (°F)	-74 to 250 (-101 to 482)	
Humidity		Welded	
Max. Operational Sinusoidal Vibration (peak)	g pk	2000	
Max. Operational Shock (± peak)	g pk	2000	
Base Strain Sensitivity	Equiv. g/μ strain	0.003	
Thermal Transient Sensitivity	Equiv. g/°C (g/°F)	0.002 (0.011)	
Magnetic Sensitivity (50 Hz–0.03 Tesla)	g/T	0.1	
Physical Characteristics			
Dimensions		See outline drawing	
Weight	gram (oz.)	54 (1.89)	
Case Material		Stainless steel	
Connector		10–32 UNF	
Mounting		10–32 UNF × 5 mm threaded hole	

[1] Low-end response of the transducer is a function of its associated electronics

Ordering Information

Type 4370 includes the following accessories:

- Carrying box
- Calibration chart
- AO 0038: Low noise cable fitted with 10–32 connectors, 1.2 m
- 10–32 UNF threaded steel stud. Length 12.7 mm

Type 4370 S includes the following accessories:

- Carrying box
- Calibration chart
- AO 0038: Low noise cable fitted with 10–32 connectors, 1.2 m
- 10–32 UNF threaded steel stud. Length 12.7 mm
- UA 0078: Accessory box including:
 - Cementing stud, 10–32 UNF
 - EP610 input adaptor, TNC to 10–32 UNF microdot
 - Mounting magnet, 10–32 UNF thread
 - Case of beeswax
 - Insulating disk

- Insulating stud
- Steel stud 10–32 UNF × ½"
- Tools

Type 4370 V includes the following accessories:

- Carrying box
- Calibration chart
- 10–32 UNF threaded steel stud. Length 12.7 mm

OPTIONAL ACCESSORIES

- AO 0038: 260°C Teflon® low-noise cable, 10–32 UNF, length 1.2 m (4 ft)
- AO 0122: 250°C, reinforced super low noise cable, 10–32, 3 m (10 ft)
- AO 0231: 260°C Teflon low-noise cable, 10–32 UNF/TNC, length 3 m (10 ft)
- AO 1382: Teflon low noise cable, double screened 10–32, 1.2 m (4 ft)
- DB 0544: 10–32 UNF Round tip
- JJ 0207: 2-pin TNC/10–32 UNF plug adaptor
- JP 0162: 10–32 UNF to TNC connector adaptor

- QA 0013: Hexagonal key for 10–32 UNF studs
- QA 0029: Tap for 10–32 UNF thread
- UA 0559: Mechanical filter for Accelerometer
- UA 0641: Extension Connector, 10–32 UNF/TNC (only top connector accelerometer)
- UA 0642: Mounting magnet and 2 insulating discs
- UA 0866: Cement stud 10–32 UNF 0.14 mm (set of 25)
- YG 0150: Steel stud 10–32/10–32 with flange
- YJ 0216: Beeswax for mounting
- YP 0080: Probe with sharp tip
- YP 0150: 10–32 UNF insulated stud. Length 12.7 mm
- YQ 2960: 0–32 UNF threaded steel stud. Length 12.7 mm
- YQ 2962: 0–32 UNF threaded steel stud. Length 7.62 mm

Brüel & Kjær reserves the right to change specifications and accessories without notice

HEADQUARTERS: DK-2850 Nærum · Denmark · Telephone: +45 4580 0500
Fax: +45 4580 1405 · www.bksv.com · info@bksv.com

Australia (+61) 2 9889-8888 · Austria (+43) 1 865 74 00 · Brazil (+55) 11 5188-8166
Canada (+1) 514 695-8225 · China (+86) 10 680 29906 · Czech Republic (+420) 2 6702 1100
Finland (+358) 9-755 950 · France (+33) 1 69 90 71 00 · Germany (+49) 421 17 87 0
Hong Kong (+852) 2548 7486 · Hungary (+36) 1 215 83 05 · Ireland (+353) 1 807 4083
Italy (+39) 0257 68061 · Japan (+81) 3 3779 8671 · Republic of Korea (+82) 2 3473 0605
Netherlands (+31) 318 55 9290 · Norway (+47) 66 77 11 55 · Poland (+48) 22 816 75 56
Portugal (+351) 21 47 11 4 53 · Singapore (+65) 377 4512 · Slovak Republic (+421) 25 443 0701
Spain (+34) 91 659 0820 · Sweden (+46) 8 449 8600 · Switzerland (+41) 1 880 7035
Taiwan (+886) 2 2502 7255 · United Kingdom (+44) 14 38 739 000 · USA (+1) 800 332 2040

Local representatives and service organisations worldwide

Brüel & Kjær 