


# MGAII


## Amplifier system

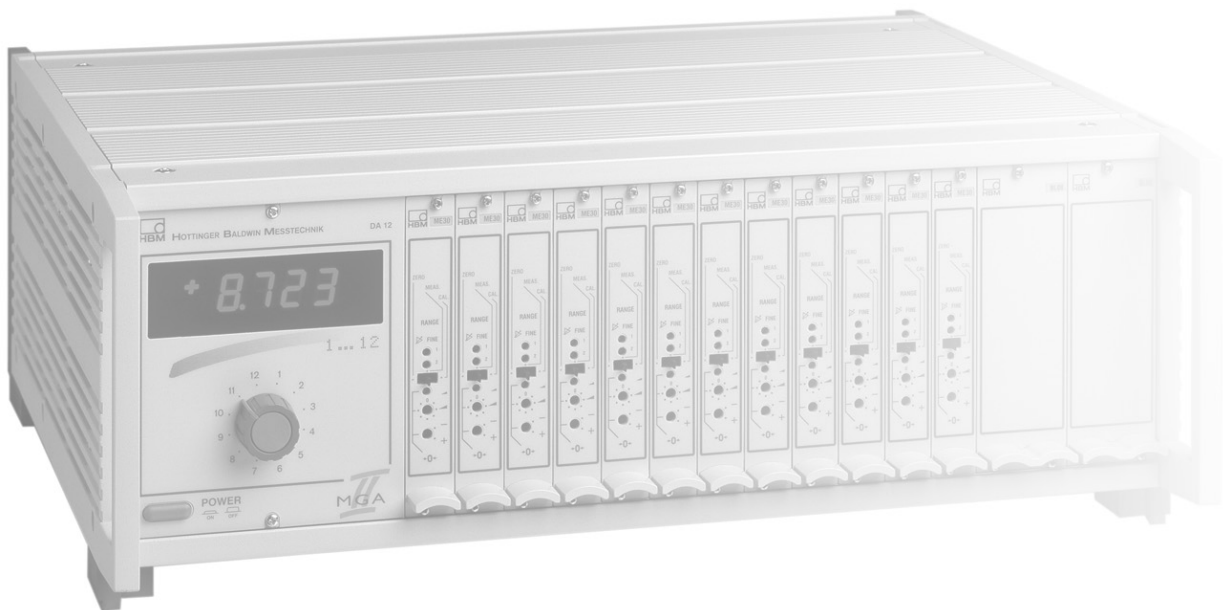

## Technical Data, system unit

<b>Mains power supply</b>			
Nominal input voltage	V AC	115 V/230 V -25+15 %	
Max. nominal input current	A	2.2/1.3	
Starting current	A	< 20	
<b>Max. power consumption</b>		W	83
<b>Nominal temperature range</b>		°C	-10...+60
<b>Service temperature range</b>		°C	-20...+60
<b>Storage temperature range</b>		°C	-25...+70
<b>Protection Class</b>		Desktop housing IP20	19" module frame IP20

## Housing dimensions (WxHxD in mm; 1 mm= 0.0397 inches)

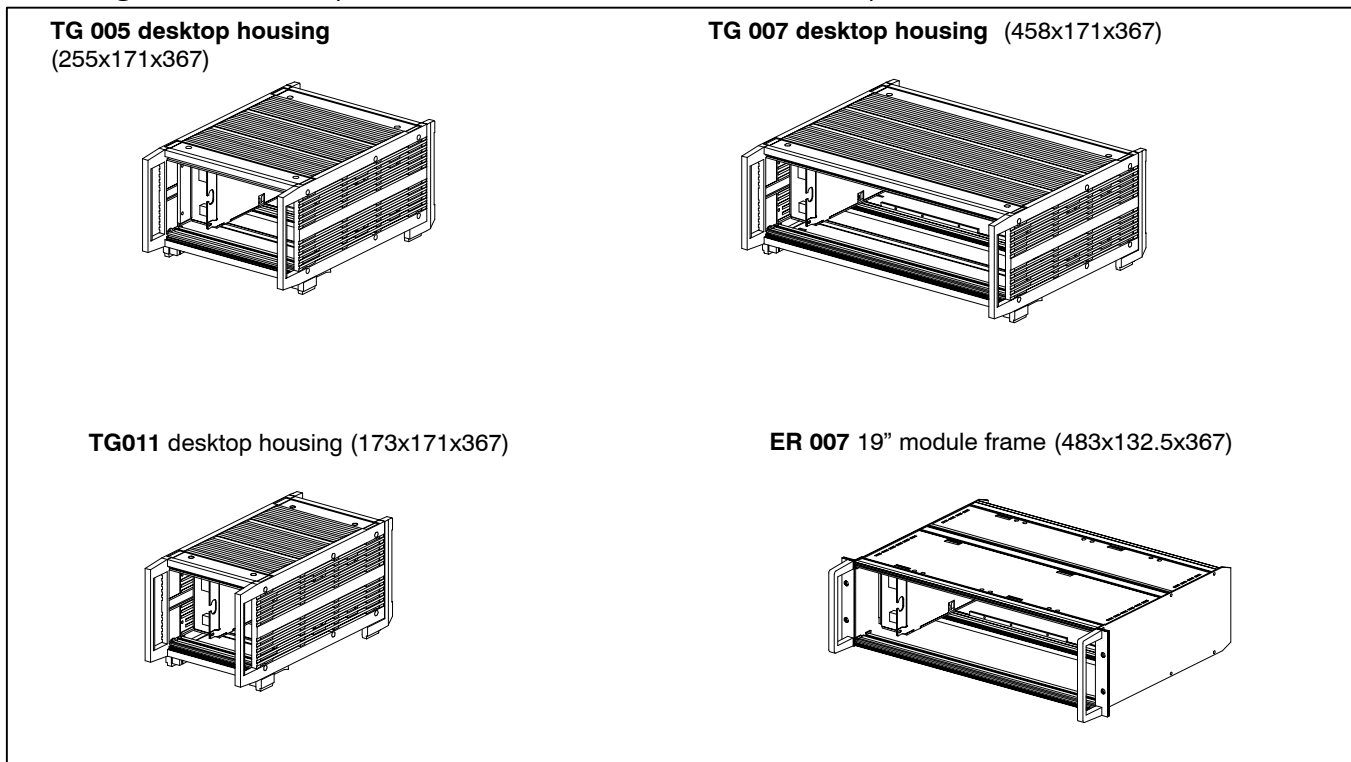

Desktop housing	Module frame	Max. number of channels	Supply voltage
TG005	-	6	230 V (115 V)~
TG007	-	12	230 V (115 V)~
TG011	-	2	230 V (115 V)~
-	ER007	12	230 V (115 V)~

## Technical Data, DA12 numeric display

Accuracy class		0.05
<b>Numeric indication range</b>		
Nominal value	d	$\pm 10,000$
Peak value	d	$\pm 19,999$
<b>Input</b>		
Measurement channels		12
Differential input voltage for nominal display value	V	$\pm 10,000$
Differential input voltage, maximum value	V	$\pm 19,999$
<b>Input resistance</b>		
Permissible common-mode rejection against zero operating voltage	k $\Omega$	$> 100$
Common-mode rejection	V	$\pm 1$
	dB	$> 50$
<b>Measurement display</b>	mm	14 Seven-segment display automatic 10,000; fixed
Polarity indication		
Decimal-point indication (can be enabled/disabled with St21)		
Overload detector	V	$> \pm 10$
<b>Measurement time /conversion time)</b>	s	0.4
<b>Integration time</b>	s	0.1
<b>Linearity variance</b> in the nominal range 10000d	d	$\pm 1$
<b>Error of symmetry</b> in the nominal range 10,000d	d	$\pm 1$
<b>Effect of 10 K change in ambient temperature</b>		
on zero point	%	0.005 of final value
on sensitivity	%	0.03

## ME10 amplifier plug-in unit

Type		ME10		
Accuracy class		0.1		
<b>Bridge supply voltage</b>	V	2.5 ± 2 %	5 ± 2 %	10 ± 2 %
<b>Attachable process-quantity transducer</b>				
Strain-gauge transducer (full bridge)	Ω	60...4000	110...4000	220...4000
Maximum cable length	m		500	
<b>Number of ranges</b>			2	
Ranges, adjustable in 12 steps	mV/V	0.4...8	0.2...4	0.1...2
Continuous fine adjustment	%		35	
Factory setting: Range 1	mV/V		± 2	
Range 2	mV/V		± 0.2	
<b>Calibration signal</b>	mV/V		+ 1 ± 0.1 %	
<b>Bridge balance range</b>				
Coarse balance, adjustable in 16 steps (polarity adjustable)	mV/V		± 2	
Fine balance, using screwdriver potentiometer	mV/V		± 0.08	
<b>Measurement frequency range</b>		Butterworth low pass 3rd order		Without low-pass
at -1 dB	Hz	0...2	0...500	0...10,000
at -3 dB	Hz	2.5	675	20,000
Phase delay time	ms	135	0.55	0.01
Rise time	ms	170	0.5	0.015
Overshoot at sudden change in signal	%	<10	<10	<0.1
<b>Input (symmetrical)</b>				
Input impedance	MΩ par. pF		>20 200	
Permitted common-mode voltage	V		± 6 V	
Common-mode rejection	dB	DC >130		0...500 Hz 100
<b>Output (asymmetrical)</b>				
Nominal voltage	V		± 10	
Permissible load resistance	kΩ		>5	
Internal resistance	Ω		<5	
<b>Noise</b> , at U <sub>B</sub> =5 V projected backwards to the input (peak-to-peak value)	μV/V	<0.1	<0.5	<2
<b>Linearity variance</b> relative to nominal voltage	%	<0.01		
<b>Effect of temperature</b> per 10 K in the nominal temperature range, relative to sensitivity	%	<0.1; typically 0.05		
to the zero point at the amplifier output in the range 2 mV/V at U <sub>B</sub> =5 V (4x350 Ω)	mV	<10, or		
in the range 0.2 mV/V at U <sub>B</sub> =5 V	mV	<100; also <0.05% of the bridge balance value		
<b>Long-term drift</b> over 48 hours (after 1h warm-up time)	μV/V	<0.1		

<sup>1)</sup> Maximum deviation of the accuracy class under the influence of strong electromagnetic fields per EN61326 in the frequency range of 80 MHz ... 1 GHz and in the frequency range of 150 kHz ... 80 MHz: 2 %.

<b>Separate amplifier ME10</b>				
<b>Stabilized Voltage</b>				
for the operation of additional units	V		± 15	
max. power consumption	mA		< 50	
<b>Supply current</b>		standard; stab.	KM001	DC-DC converter
<b>Supply voltage</b>	V	± 14.5... ± 15.5	± 15.6... ± 25	+9...+35
max. current consumption (without additional units)	mA	± 65	< ± 75	340...140
influence of supply voltage for changes in the relevant range				
the measuring sensitivity	%	< 0.06	< 0.02	< 0.02
the zero point	μV/V	< 0.1	< 0.1	< 0.1
<b>Output current, with option EM002</b>	mA	± 20 acc. +4...+20		
permissible connection resistance	W	0...500		
internal resistance	kΩ	> 100		
current consumption				
with standard and KM001 add.	mA	< ± 30		
with DC-DC converter	mA	75...25		
linearity deviation related to nominal current	%	< 0.05		

## ME30 amplifier plug-in unit

Type		ME30	
<b>Accuracy class</b>		<b>0.1</b>	
<b>Carrier frequency</b>	Hz	600 ± 0.5 %	
<b>Bridge supply voltage</b>	V	2.5 ± 2 %	5 ± 2 %
<b>Attachable process-quantity transducer</b>			
Strain-gauge transducer (full bridge)	Ω	60...4000	110...4000
Maximum cable length	m	500	
<b>Number of ranges</b>			
Ranges, adjustable in 12 steps	mV/V	0.4...8	0.2...4
Continuous fine adjustment	%	35	
Factory setting: Range 1	mV/V	± 2	
Range 2	mV/V	± 0.2	
<b>Calibration signal</b>			
<b>Bridge balance range</b>			
Coarse balance, adjustable in 16 steps (polarity adjustable)	mV/V	± 2	
Fine balance, using screwdriver potentiometer	mV/V	± 0.08	
<b>Measurement frequency range</b>		Butterworth low-pass 3rd order, switchable	
at -1 dB	Hz	0...2	0...60
at -3 dB	Hz	2.5	80
Phase delay time	ms	135	4.8
Rise time	ms	170	7
Overshoot at sudden change in signal	%	<10	
Residual carrier voltage	%	<0.1	<0.2; typically 0.1
<b>Input (symmetrical)</b>			
Input impedance	MΩ par. pF	>10 470	
Permitted common-mode voltage	V	± 6 V	
Common-mode rejection	dB	0...600 Hz: >50	
<b>Output (asymmetrical)</b>			
Nominal voltage	V	± 10	
Permissible load resistance	kΩ	>5	
Internal resistance	W	<5	
<b>Noise, projected backwards to the input</b>		μV/V	
		<0.2 (peak-to-peak); typically 0.1	
<b>Linearity variance</b>			
relative to nominal voltage	%	<0.02; typically 0.01	
<b>Effect of temperature per 10 K in the nominal temperature range relative</b>			
to sensitivity	%	<0.1; typically 0.05	
to the zero point at the amplifier output			
in the range 2 mV/V at U <sub>B</sub> =5 V (4x350 Ω)	mV	<4, or	
in the range 0.2 mV/V at U <sub>B</sub> =5 V	mV	<13; also <0.05 % of the bridge balance value	
<b>Long-term drift over 48 hours (after 1 h warm-up time)</b>		μV/V	
		<0.05	

Einzelbetrieb amplifier ME30				
<b>Stabilized Voltage</b>				
for the operation of additional units	V		± 15	
max. power consumption	mA		< 50	
<b>Supply current</b>		standard; stab.	KM001	DC-DC converter
<b>Supply voltage</b>	V	± 14.5... ± 15.5	± 15.6... ± 25	+9...+35
max. current consumption (without additional units)	mA	+ 70 / -65	< + 80 / < -70	340...140
influence of supply voltage for changes in the relevant range				
the measuring sensitivity	%	< 0.8	< 0.02	< 0.02
the zero point	μV/V	< 0.1	< 0.1	< 0.1
<b>Output current, with option EM002</b>	mA	± 20 acc. +4...+20		
permissible connection resistance	W	0...500		
internal resistance	kΩ	> 100		
current consumption				
with standard and KM001 add.	mA	< ± 30		
with DC-DC converter	mA	75...25		
linearity deviation related to nominal current	%	< 0.05		

## ME50 amplifier plug-in unit

Type		ME50	
<b>Accuracy class</b>		<b>0.1</b>	
<b>Carrier frequency</b>	Hz	4800 ± 0.5 %	
<b>Bridge supply voltage</b>	V	1 ± 3 %	2.5 ± 2 %
<b>Attachable process-quantity transducer</b>			
Inductive transducer (half bridge)	mH	2.5...20	
Maximum cable length	m	100	
<b>Number of ranges</b>			
Ranges, adjustable in 12 steps	mV/V	20...400	8...160
Continuous fine adjustment	%	35	
Factory setting: Range 1	mV/V	± 80	
Range 2	mV/V	± 8	
<b>Calibration signal</b>			
<b>Bridge balance range</b>	mV/V	+8 ± 0.1 %	
Coarse balance, adjustable in 16 steps (polarity adjustable)	mV/V	± 80	
Fine balance, using screwdriver potentiometer	mV/V	± 3.2	
<b>Measurement frequency range</b>		Butterworth low-pass 3rd order, switchable	
at -1 dB	Hz	0...2	0...500
at -3 dB	Hz	2.5	675
Phase delay time	ms	135	0.55
Rise time	ms	170	0.5
Overshoot at sudden change in signal	%	<10	<10
Residual carrier voltage	%	<0.02	<0.2; typically 0.1
<b>Input (symmetrical)</b>			
Input impedance	MΩ par. pF	>0.2 100	
Permitted common-mode voltage	V	± 6 V	
Common-mode rejection	dB	0...4800 Hz: > 50	
<b>Output (asymmetrical)</b>			
Nominal voltage	V	± 10	
Permissible load resistance	kΩ	>5	
Internal resistance	Ω	<5	
<b>Noise, projected backwards to the input</b>		500 Hz:<8 (peak-to-peak) 2 Hz:<0.08 (peak-to-peak)	500 Hz:<8 (peak-to-peak) 2 Hz:<0.08 (peak-to-peak)
<b>Linearity variance</b> relative to nominal voltage		% <0.05; typically 0.02	
<b>Effect of temperature</b> per 10 K in the nominal temperature range relative to sensitivity		% <0.15; typically 0.1	
to the zero point at the amplifier output		μV/V <8; typically 4 also <0.05% of the bridge balance value	
<b>Long-term drift</b> over 48 hours (after 1 h warm-up time)		μV/V <0.8	



Einzelbetrieb amplifier ME50				
<b>Stabilized Voltage</b>				
for the operation of additional units	V		± 15	
max. power consumption	mA		< 50	
<b>Supply current</b>		standard; stab.	KM001	DC-DC converter
<b>Supply voltage</b>	V	± 14.5... ± 15.5	± 15.6... ± 25	+9...+35
max. current consumption (without additional units)	mA	+ 45 / -40	< + 50 / < -45	230...75
influence of supply voltage for changes in the relevant range				
the measuring sensitivity	%	< 0.8	< 0.02	< 0.02
the zero point	μV/V	< 0.8	< 1.6	< 4
<b>Output current, with option EM002</b>	mA	± 20 acc. +4...+20		
permissible connection resistance	W	0...500		
internal resistance	kΩ	> 100		
current consumption				
with standard and KM001 add.	mA	< ± 30		
with DC-DC converter	mA	75...25		
linearity deviation related to nominal current	%	< 0.05		


# ME50S6 amplifier plug-in unit

Type		ME50S6	
<b>Accuracy class</b>		<b>0.1</b>	
<b>Carrier frequency</b>	Hz	4800 ± 0.5 %	
<b>Bridge supply voltage</b>	V	1 ± 2 %	5 ± 2 %
<b>Attachable process-quantity transducer</b>			
Strain-gauge transducer (full bridge)	Ω	60...4000	110...4000
Maximum cable length	m	300 (from 100 – 500 m cable length: typical measurement error of the accuracy class: ± 1,7 %)	
<b>Number of ranges</b>		2	
Ranges, adjustable in 12 steps	mV/V	1...20	0.2...4
Continuous fine adjustment	%	35	
factory setting: Range 1	mV/V	± 1	
Range 2	mV/V	± 0.2	
<b>Calibration signal</b>	mV/V	+1 ± 0.1 %	
<b>Bridge balance range</b>			
Coarse balance, adjustable in 16 steps (polarity adjustable)	mV/V	± 2	
Fine balance, using screwdriver potentiometer	mV/V	± 0.08	
<b>Measurement frequency range</b>		Butterworth low-pass 3rd order, switchable	
at -1 dB	Hz	0...40	0...250
at -3 dB	Hz	50	300
Phase delay time	ms	7	1.1
Rise time	ms	10	1.6
Overshoot at sudden change in signal	%	<10	<10
Residual carrier voltage	%	<0.02	<0.2; typically 0.1
<b>Input (symmetrical)</b>			
Input impedance	MΩ par. pF	>10 470	
Permitted common-mode voltage	V	± 6 V	
Common-mode rejection	dB	0...600 Hz: >50	
<b>Output (asymmetrical)</b>			
Nominal voltage	V	± 10	
Permissible load resistance	kΩ	>5	
Internal resistance	Ω	<5	
<b>Noise</b> , projected backwards to the input	μV/V	<0.2 (peak-to-peak); typically 0.1	<0.2 (peak-to-peak); typically 0.1
<b>Linearity variance</b> relative to nominal voltage	%	<0.02; typically 0.01	
<b>Effect of temperature</b> per 10 K in the nominal temperature range relative			
to sensitivity	%	<0.1; typically 0.05	
to the zero point at the amplifier output in the range 2 mV/V at U <sub>B</sub> =5 V (4x350 Ω) in the range 0.2 mV/V at U <sub>B</sub> =5 V	mV mV	<4, or <13; also <0.05 % of the bridge balance value	
<b>Long-term drift</b> over 48 hours (after 1 h warm-up time)	μV/V	<0.05	


Einzelbetrieb amplifier ME50S6				
<b>Stabilized Voltage</b>				
for the operation of additional units	V		± 15	
max. power consumption	mA		< 50	
<b>Supply current</b>		standard; stab.	KM001	DC-DC converter
<b>Supply voltage</b>	V	± 14.5... ± 15.5	± 15.6... ± 25	+9...+35
max. current consumption (without additional units)	mA	< + 70 / < -65	< + 80 / < -70	340...140
influence of supply voltage for changes in the relevant range				
the measuring sensitivity	%	< 0.8	< 0.02	< 0.02
the zero point	μV/V	< 0.1	< 0.1	< 0.1
<b>Output current, with option EM002</b>	mA	± 20 acc. +4...+20		
permissible connection resistance	W	0...500		
internal resistance	kΩ	> 100		
current consumption				
with standard and KM001 add.	mA	< ± 30		
with DC-DC converter	mA	75...25		
linearity deviation related to nominal current	%	< 0.05		

## Connection boards


AP01



AP03



AP11



<b>AP01</b> (connection board with D-connector)		
Width	mm	20.3 (4 divs)
Transducer port		D-plug, 15-pin, DA-15P <sup>1)</sup>
Port for output signal		D-plug, 25-pin, DB-25P <sup>2)</sup>
Option		2x EM001; 2x RM001 with AP02

<b>AP03</b> (AP08 connection board with MS-connector)		
Width	mm	40.6 (8 divs)
Transducer port		MS-cable plug, 7-pin, MS3106A 16S-1P <sup>3)</sup>
Port for output signal		D-plug, 25-pin, DB-25P <sup>2)</sup>
Option		2x EM001, 2x RM001 with AP02

<b>AP11</b> (connection board with LEMO socket)		
Width	mm	20.3 (4 divs)
Transducer port		LEMO FGG . 1B.306 6-pin <sup>4)</sup>
Port for output signal		D-plug, 25-pin, DB-25P <sup>2)</sup>
Option		2x EM001; 2x RM001 with AP02

- 1) HBM order number 2-9278.0321
- 2) HBM order number 2-9278.0293
- 3) HBM order number 1-MS3106PEMV
- 4) HBM order number 3-3312.0126

### End phase module EM001

<b>Input</b>		
Input voltage	V	-10 ... +10
Input resistance	kOhm	12.5
<b>Output</b>		
Impressed voltage	V	-10 ... +10
Impressed current	mA	± 20 / 4 ... 20
Load resistance	Ohm	max. 500, min. 0
Measurement frequency range	kHz	0...10
Operating voltage	V	+16; -16
Current consumption	mA	35

© Hottinger Baldwin Messtechnik GmbH. All rights reserved.  
 All details describe our products in general form only.  
 They are not to be understood as express warranty and do  
 not constitute any liability whatsoever.

### Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45 · 64293 Darmstadt · Germany  
 Tel. +49 6151 803-0 · Fax: +49 6151 803-9100  
 Email: info@hbm.com · www.hbm.com



measure and predict with confidence