

# Series LYC60X

Submersible, Long Stroke LVDT Displacement Transducer,  
AC/AC, Captive Guide Armature



## Description

The Series LYC60X submersible long stroke LVDT is designed specifically for applications requiring displacement measurements while submerged in fresh water or most other non-corrosive liquids and gases for prolonged periods. Pressure ratings range from 145 psi to 3000 psi. The armature is captured in the LVDT housing and is guided by a low-friction bearing assembly. These LVDT's have a total stroke range of 1 to 37 inches. The Series LYC60X displacement transducers can be used for both static and dynamic applications. This position sensor requires separate signal conditioning and provides optimum performance when powered with between 0.5V and 7V at 5KHz. These displacement transducers are ruggedly constructed of all stainless steel and are able to withstand harsh underwater environments such as mining, upstream oilfield, geophysical, and industrial processes. All Series LYC60X displacement transducers are shipped with traceable calibration certificates.

## Standard Features

- Stroke ranges from  $\pm 0.5$  inches to  $\pm 18.5$  inches
- Submersible
- AC/AC
- Pressure Ratings of 145 psi to 3000 psi
- Captive Armature
- Low Friction Bearing Assembly
- $\pm 0.5\%$  Linearity
- Infinite Resolution
- All Stainless Steel Construction
- Traceable Calibration Certificate

## Optional Features

- Improved Linearity
- Cable and Connector Exits
- Mounting Blocks

## Performance

### Stroke Ranges

$\pm 0.5$  inches to  $\pm 18.5$  inches

### Linearity

$\pm 0.5\%$  of full stroke max  
 $\pm 0.25\%$  or  $\pm 0.1$  options on some ranges

### Output (Full scale rms)

(0.8 to 3.7) Volts/Volt (dependent on stroke) (Refer to dimension table)

### Resolution


Infinite

**LYC60X**


# Series LYC60X Specifications

Baseline Configuration Specs Represented.  
Modifications Encouraged - See Below  
Custom Designs Available

## Dimensions (inches)

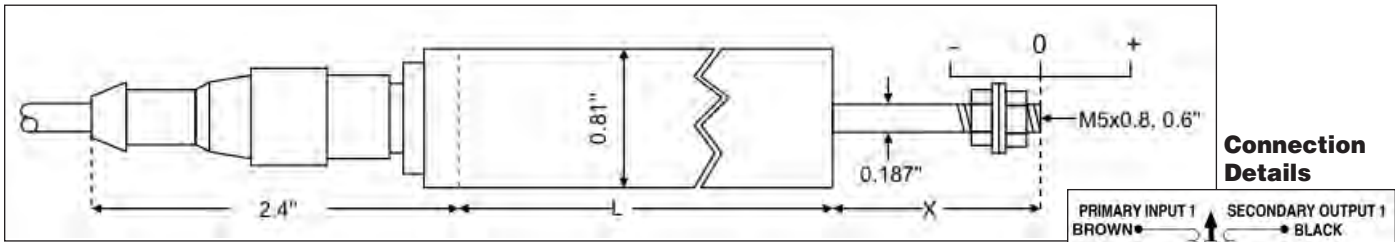

### Connection Details

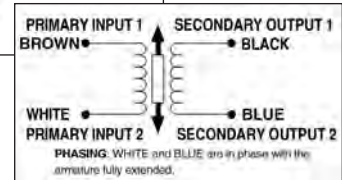

Range	Linearity error (% F.S.)	L	X	Total Weight	Inward over-travel	Outward over-travel	Sensitivity (nom)
±0.5"	<± 0.5	6.0"	1.5"	11oz	0.4"	1.1"	0.7V/V
±1"	<± 0.5	7.1"	2.5"	13oz	0.7"	1.0"	0.9V/V
±2"	<± 0.5	12.0"	3.0"	1lb	0.4"	1.1"	1.5V/V
±3"	<± 0.5	16.5"	4.5"	2lb	0.9"	1.1"	1.5V/V
±4"	<± 0.5	17.8"	5.0"	2lb	0.4"	1.1"	3.2V/V
±6"	<± 0.5	24.9"	7.0"	2lb	0.4"	1.4"	2.4V/V
±8"	<± 0.5	33.8"	10.0"	3lb	1.4"	1.6"	1.5V/V
±10"	<± 0.5	41.1"	12.0"	4lb	1.4"	1.9"	2.0V/V
±15"	<± 0.5	56.8"	16.0"	5lb	0.4"	1.1"	3.2V/V
±18.5"	<± 0.5	67.6"	20.0"	6lb	0.9"	1.4"	3.6V/V

## Mechanical Characteristics

### Case Material

Stainless steel.

### Armature Type

Captive Guided.

### Probe Thread

M5 x 0.8.

## Electrical Characteristics

### Excitation Supply

0.5V to 7V rms, 2kHz to 10kHz, sinusoidal.  
(Calibrated at 5V rms, 5kHz, sinusoidal).

### Output Load (Optimum)

100K Ohms.

### Electrical Termination

Underwater connector with fitted cable (16 ft.) 145 psi maximum static pressure (standard)  
Axial connector (standard)  
(Consult factory for available optional terminations)

## Environmental Characteristics

### Operating Temperature Range

-40°F to +250°F.

### Temperature Effect on Zero

±0.006% F.S./°F (typical).

### Temperature Effect on Span

±0.006% F.S./°F (typical).

## MODEL IDENTIFICATION

**L Y C 6 0 X**  
SERIES  
ELECTRICAL TERMINATIONS

Please specify termination required:

- X = 1 Axial Cable Exit (Optional)
- 2 Radial Cable Exit (Optional)
- 3 Axial Connector (Standard)
- 4 Radial Connector (Optional)
- 5 Pins Only for Customer Wiring (Optional)



MODIFICATIONS: We realize LVDT applications vary greatly and as such our designs are flexible. Choice of electrical termination, material compatibility and performance characteristics are a few of the many options available. Specifications on this datasheet represent the standard configuration only. Product and company names listed are trademarks of their respective companies. Specifications subject to change without notice.

WARRANTY: Stellar Technology warrants that its product shall be free from defective workmanship and/or material for a twelve month period from the date of shipment, provided that Stellar Technology's obligation hereunder shall be limited to correcting any defective material FOB our factory. No allowance will be made for any expenses incurred for correcting any defective workmanship and/or material without written consent by Stellar Technology. This warranty is in lieu of all other warranties expressed or implied.

Find More Information at:  
[stellartech.com](http://stellartech.com)

Due to the nature of technology, changes are inevitable. For latest technical specifications, see our website.

Copyright © Stellar Technology Incorporated • All Rights Reserved  
Datasheet P/N: 233643A

237 Commerce Drive • Amherst, NY 14228 • USA  
Tel: 716.250.1900 • Fax: 716.250.1909  
Email: info@stellartech.com

