

Series LYU61X

Submersible Long Stroke LVDT Displacement Transducer,
DC/DC, Unguided Armature



Description

The Series LYU61X submersible, long stroke, DC powered LVDT is designed specifically for applications requiring displacement measurements while submerged in fresh water or most other non-corrosive liquids and gases for prolonged periods. Pressure ratings range from 145 psi to 3000 psi. The armature is loose fit in the bore of the LVDT and is attached to the moving part by a threaded end. Precise alignment along the bore produces a frictionless movement. This design allows the armature to be separated from the body without disconnecting either part. This type of LVDT is most suited for applications where dynamic measurements are to be made. This position sensor operates from unregulated power supplies of +24 Vdc to +40 Vdc or dual ± 12 Vdc to ± 20 Vdc and utilizes an internal amplifier to generate a ± 5 Vdc output signal. These displacement transducers are ruggedly constructed of all stainless steel and are able to withstand harsh underwater environments such as mining, upstream oilfield, geophysical, and industrial processes. All Series LYU61X displacement transducers are shipped with traceable calibration certificates.

Standard Features

- Stroke ranges from ± 0.1 inches to ± 8 inches
- ± 5 Vdc – F.S. output
- Unguided Armature
- Frictionless Movement
- DC/DC
- $\pm 0.5\%$ Linearity
- High Resolution
- Encapsulated Integral Electronics
- All Stainless Steel Construction
- Traceable Calibration Certificate

Optional Features

- Improved Linearity
- Cable and Connector Offerings
- Mounting Blocks

Performance

Stroke Ranges

± 0.1 inches to ± 8 inches

Linearity

$\pm 0.5\%$ of full stroke max
 $\pm 0.25\%$ or ± 0.1 options on some ranges

Output Voltage


± 5 Vdc

LYU61X

Series LYU61X Specifications

Baseline Configuration Specs Represented.
Modifications Encouraged - See Below
Custom Designs Available

Dimensions (inches)

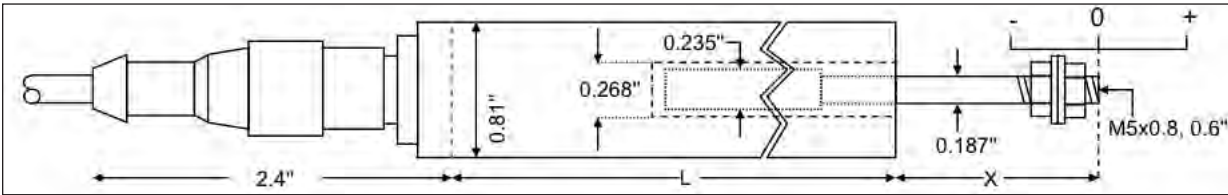

Range	Linearity error (% F.S.)	L	X	Total Weight	Armature Weight	Inward over-travel
±0.1"	<±0.5	2.7"	1.28"	4oz	0.05oz	0.4"
±0.2"	<±0.5	2.7"	1.28"	4oz	0.06oz	0.3"
±0.3"	<±0.5	2.7"	1.28"	4oz	0.06oz	0.2"
±0.4"	<±0.5	2.7"	1.28"	4oz	0.07oz	0.1"
±0.5"	<±0.5	8.0"	1.5"	9oz	0.7oz	0.4"
±1"	<±0.5	9.1"	2.5"	11oz	0.9oz	0.9"
±2"	<±0.5	13.9"	3.0"	14oz	1.4oz	0.4"
±3"	<±0.5	18.5"	4.5"	1.2lb	2.0oz	0.9"
±4"	<±0.5	19.8"	5.0"	1.4lb	2.5oz	0.4"
±6"	<±0.5	27.8"	7.0"	1.9lb	3.7oz	0.4"
±8"	<±0.5	35.8"	10.0"	2.8lb	5.0oz	1.4"

Mechanical Characteristics

Case Material

Stainless steel.

Armature Type

Free Unguided.

Probe Thread

M5 x 0.8.

Pressure Rating

145 psi (standard).

3000 psi (maximum) – depends on cable exit option.

Set-ups

Please Specify Set-up Required:

Set-up	(-) Position	(0) Position	(+) Position
Standard			
1	0V	5V	10V(+0%-5%)
2	-5V(+0%-5%)	0V	+5V(+0%-5%)
Optional			
3	10V(+0%-5%)	5V	0V
4	+5V(+0%-5%)	0V	-5V(+0%-5%)

Electrical Characteristics

Supply Voltage (Dual)

±12 to ±20 Vdc, 30 mA.

Supply Voltage (Single)

24Vdc to 40Vdc (must be floating), 30 mA.

Output Impedance

2 Ohms.

Output Load (Optimum)

10K Ohms.

Output Ripple

30mV peak to peak (typical).

Electrical Output Bandwidth

200 Hz.

Electrical Termination

Underwater connector with fitted cable (16 ft.) 145 psi maximum static pressure (standard)

Axial connector (standard)

(Consult factory for available optional terminations)

Environmental Characteristics

Operating Temperature Range

-58°F to +176°F.

Temperature Effect on Zero

±0.006% /°F (typical).

Temperature Effect on Span

±0.017% /°F (typical).

MODEL IDENTIFICATION

L Y U 6 1 X


SERIES

ELECTRICAL TERMINATIONS


Please specify termination required:

- X = 1 Axial Cable Exit (Optional)
- 2 Radial Cable Exit (Optional)
- 3 Axial Connector (Standard)
- 4 Radial Connector (Optional)
- 5 Pins Only for Customer Wiring (Optional)

Connection Details - Standard

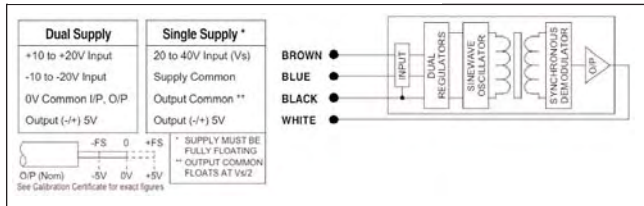

Connection Details - Optional

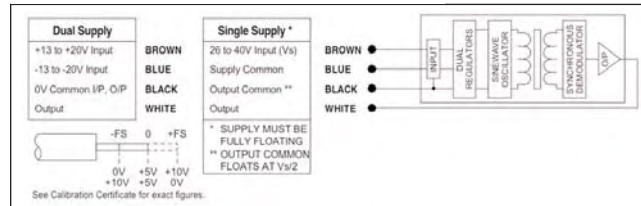

MODIFICATIONS: We realize LVDT applications vary greatly and as such our designs are flexible. Choice of electrical termination, material compatibility and performance characteristics are a few of the many options available. Specifications on this datasheet represent the standard configuration only. Product and company names listed are trademarks of their respective companies. Specifications subject to change without notice.

WARRANTY: Stellar Technology warrants that its product shall be free from defective workmanship and/or material for a twelve month period from the date of shipment, provided that Stellar Technology's obligation hereunder shall be limited to correcting any defective material FOB our factory. No allowance will be made for any expenses incurred for correcting any defective workmanship and/or material without written consent by Stellar Technology. This warranty is in lieu of all other warranties expressed or implied.

Find More Information at:
stellartech.com

Due to the nature of technology, changes are inevitable. For latest technical specifications, see our website.

237 Commerce Drive • Amherst, NY 14228 • USA

Tel: 716.250.1900 • Fax: 716.250.1909

Email: info@stellartech.com

Copyright © Stellar Technology Incorporated • All Rights Reserved
Datasheet P/N: 233641B

