



Series CNR960XX

High Capacity/High Accuracy

Tension and Compression Canister Load Cell with Internal Amplifier



Description

The Series CNR960XX tension / compression canister style load cells with internal amplifier. They are designed specifically for high capacity and high accuracy test and measurement applications requiring long fatigue life combined with high resistance to the effects of extraneous bending and off-axis loading. In addition, they have internal amplifiers. Customers can select 4-20 mA current output, numerous voltage outputs, as well as digital outputs including RS232, RS485, and CANbus. Constructed of electroless nickel plated carbon steel, all CNR960XX load cells are manufactured to be shock and vibration resistant. Each unit is shipped with an 10 point calibration (5 points in both tension and compression) record traceable to NIST as standard.

(See data sheet for Series CNR960 for mV/V version)

Standard Features

- Tension and Compression
- Load Ranges to 2 Million Pounds
- High Level Output (Analog and Digital)
- High Static Accuracy
- High Fatigue Life
- High Immunity to Off-Axis Loading
- Center Thread Mount or Circular Bolt Mount

Optional Features

- Dual Bridge Configurations
- Customer Specified Electrical Termination
- Special Calibrations
- Metric Threads
- Expanded Temperature Compensation Ranges

Performance

Standard Ranges

25K, 50K, 100K, 150K, 200K, 300K, 500K, 800K, 1000K, 2000K lbf.

Static Accuracy

Linearity: $\pm 0.2\%$ FSO.
Hysteresis: $\pm 0.2\%$ FSO.
Repeatability: $\pm 0.05\%$ FSO.

Temperature Effect on Zero

$\pm 0.003\%$ FSO/ $^{\circ}$ F.

Temperature Effect on Span

$\pm 0.003\%$ Reading/ $^{\circ}$ F.

Zero Balance

$\pm 1\%$ FSO at 70 $^{\circ}$ F.

Electrical Outputs

Analog and Digital.

Environmental Characteristics

Operating Temperature Range

-65 $^{\circ}$ F to + 250 $^{\circ}$ F.

(Note: Maximum operating temperature for digital output is +185 $^{\circ}$ F)

Compensated Temperature Range

70 $^{\circ}$ F to 170 $^{\circ}$ F.

Optional expanded ranges available


CNR960XX

Your Application-Solution SourceSM

Series CNR960XX Specifications

Baseline Configuration Specs Represented.
Modifications Encouraged - See Below
Custom Designs Available

Dimensions (inches)

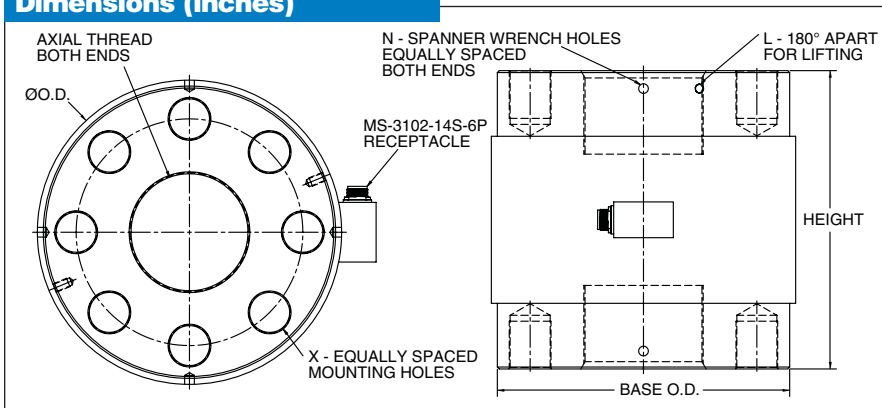

MODEL IDENTIFICATION

C	N	R	9	6	0	X	X
SERIES						ANALOG OUTPUT	DIGITAL OUTPUT
						0 = Isolated Voltage	0 = None
						1 = None	1 = RS-485
						2 = Non-Isolated Voltage	2 = RS-232
						5 = 4-20 mA 2-wire Loop (not available with Digital Output)	4 = CANbus
						6 = 4-20 mA 3-wire	

Capacity (lbs.)	Type	ØOD	Base OD	Axial Thread	Height	X	Mounting Holes	N (Each End)	Spanner Wrench Holes	L	Lifting Holes
25K, 50K, 100K, 150K	A	6	5.5	2-12 UN-2B, 2.00 deep	7.0	6	3/4-10 UNC-2B, 1.25 deep, Ø3.50 B.C. Dia.	3	Ø0.38, 0.31 deep	0	n/a
150K, 200K, 300K	B	7.5	7.0	3-12 UN-2B, 3.00 deep	10.0	8	1-8 UNC-2B, 1.50 deep, Ø5.00 B.C. Dia.	6	Ø0.41, 0.38 deep	0	n/a
500K, 800K, 1000K	C	12.8	12.3	5-8 UN-2B, 3.50 deep	12.5	8	1 3/4 -12 UN-2B, 2.0 deep, Ø9.50 B.C. Dia.	4	Ø0.41, 0.38 deep.	2	3/8-16, UNC-2B, 0.65 deep
500K, 800K, 1000K	D	12.8	12.3	5-8 UN-2B, 5.30 deep	16.0	8	1 3/4 -12 UN-2B, 2.0 deep, Ø9.50 B.C. Dia.	4	Ø0.41, 0.38 deep.	2	3/8-16, UNC-2B, 0.65 deep
2000K	E	17.6	17	6-8 UN-2B, 8.25 deep	22.5	12	1 3/4 -12 UN-2B, 3.5 deep, Ø12.00 B.C. Dia.	6	Ø0.41, 0.38 deep	2	3/4-10, UNC-2B, 1.5 deep

Mechanical Characteristics

Static Overload Without Damage
150% of nominal capacity.

Calibration

Standard calibration is 5 pts (0, 50%, 100%, 50%, 0) in both tension and compression.

Important Note: Factory calibration based on customer's use. Specify if load cell will be mounted using mounting bolt holes or axial threaded hole.

Material

Electroless nickel-plated carbon steel with painted carbon steel cover.

Fatigue Life

Greater than 100 million fully reversed cycles at FSO.

Electrical Characteristics

ANALOG OUTPUTS

Excitation

4-20mA Current Loop:

9-36 Vdc for 2-wire.

9-36 Vdc for 3-wire.

Isolated Voltage Output (0-5 Vdc, 0-10 Vdc):

14-32 Vdc (standard).

8-18 Vdc (No charge option).

Non-Isolated Voltage Output:

8-40 Vdc for 1-5 Vdc, 3-wire (standard).

8-40 Vdc for 1-6 Vdc, 3-wire (No charge option).

8-40 Vdc for 0-5 Vdc, 4-wire (No charge option).

Additional outputs and related excitations available.

DIGITAL OUTPUTS

Excitation

RS-232, RS-485

8-30 Vdc.

CANbus

4-18 Vdc (standard).

14-32 Vdc (optional).

Programming

PC.

Electrical Characteristics

DUAL OUTPUTS (Analog & Digital) Excitation

3-wire Current plus Digital:

12-32 Vdc.

Isolated Voltage plus Digital:

14-32 Vdc.

Non-Isolated Voltage plus Digital:

8-30 Vdc.

COMMON

Insulation Resistance

> 100 megohms at 50 Vdc at 70°F.

Electrical Termination

MS-3102-14S-6P stainless steel electrical receptacle or equivalent.

Optional electrical terminations, including Integral cable, are available (consult factory).

Electrical Protection

- EMI Protected. (Optional for Isolated Voltage).
- Surge Protection to 500 Vdc. (Optional for Isolated Voltage).
- Reverse polarity protected.
- Short circuit protected.



NOTES: When using a load cell the user must consider load ratings and fatigue life for long term use and structural integrity. Critical loading applications, especially overhead loading, must always be designed with safety redundant load paths.

MODIFICATIONS: We realize load cell applications vary greatly and as such our designs are flexible. Specifications subject to change without notice.

WARRANTY: Stellar Technology warrants that its product shall be free from defective workmanship and/or material for a twelve month period from the date of shipment, provided that Stellar Technology's obligation hereunder shall be limited to correcting any defective material FOB our factory. No allowance will be made for any expenses incurred for correcting any defective workmanship and/or material without written consent by Stellar Technology. This warranty is in lieu of all other warranties expressed or implied.

Find More Information at:
stellartech.com

Due to the nature of technology, changes are inevitable. For latest technical specifications, see our website.