


### Special features


- Accuracy classes C3/C3MR and C6/C6MR with OIML-R60 test report
- Max. capacities: 7.2 kg ... 72 kg
- Off center load compensated (OIML R 76)
- Degree of protection IP67 (according to EN 60 529)
- Shielded connection cable
- Optimized for static weighing applications

### Optional:

- Different accuracy classes with OIML-R60 test report
- Connection cable in six wire circuit
- Different cable lengths
- Aligned output, suitable for connection in parallel

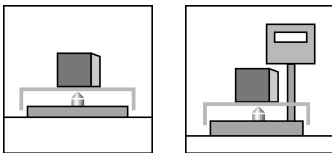

### Dimensions (in mm; 1 mm = 0.03937 inches)

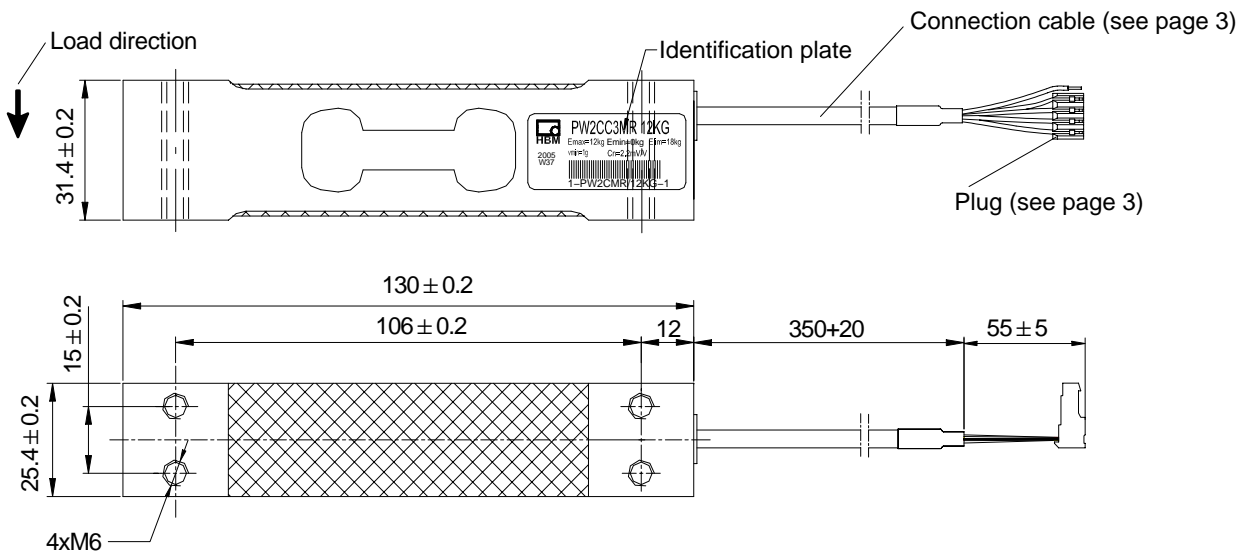

### Mounting:

- Max. capacities  $\leq 36$  kg: cylindrical head screw M6-8.8, tightening torque: 6 N·m
- Max. capacities = 72 kg: cylindrical head screw M6-10.9, tightening torque: 10 N·m

## Specifications

Type	PW2C...					
Accuracy class <sup>1)</sup>	C3, C3MR					
Maximum number of load cell intervals (n <sub>LC</sub> )	3000					
Maximum capacity (E <sub>max</sub> ) <sup>2)</sup>	kg	7.2	12	18	36	72
Minimum LC verification interval (v <sub>min</sub> ) (Accuracy class C3)	g	1	2	5	10	20
Temperature effect on zero balance (TK <sub>0</sub> ) (Accuracy class C3)	% of C <sub>n</sub> / 10 K	±0.0194	±0.0233	±0.0389	±0.0389	±0.0389
Minimum LC verification interval (v <sub>min</sub> ) (Accuracy class C3MR)	g	0.5	1	2	5	10
Temperature effect on zero balance (TK <sub>0</sub> ) (Accuracy class C3MR)	% of C <sub>n</sub> / 10 K	±0.0097	±0.0116	±0.0155	±0.0194	±0.0194
Max. platform size	mm	380 x 380				
Sensitivity (C <sub>n</sub> )	mV/V	2.2 ± 0.2				
Zero signal	mV/V	0 ± 0.12				
Temperature effect on sensitivity (TK <sub>C</sub> ) <sup>3)</sup> in the temperature range +20 ... +40 °C [+68 ... +104 °F] -10 ... +20 °C [+14 ... +68 °F]	% of C <sub>n</sub> / 10 K	±0.0175 ±0.0117				
Relative reversibility error (d <sub>hy</sub> ) <sup>3)</sup>	% of C <sub>n</sub>	±0.0166				
Linearity deviation (d <sub>lin</sub> ) <sup>3)</sup>		±0.0166				
Minimum dead load output return (MDLOR)		±0.0166				
Off-center load error <sup>4)</sup>		±0.0233				
Input resistance (R <sub>LC</sub> )	Ω	300...500				
Output resistance (R <sub>0</sub> )		300...500				
Reference excitation voltage (U <sub>ref</sub> )	V	5				
Nom. range of excitation voltage (B <sub>U</sub> )		1 ... 12				
Isolation resistance (R <sub>is</sub> ) at 100 V <sub>DC</sub>	GΩ	> 2				
Nominal (rated) range of ambient temperature (B <sub>T</sub> )	°C [°F]	-10 ... +40 [+14 ... +104]				
Operating temperature range (B <sub>tu</sub> )		-10 ... +50 [+14 ... +122]				
Storage temperature range (B <sub>l</sub> )		-25 ... +70 [-13 ... +158]				
Limit load (E <sub>L</sub> ) <sup>*)</sup>	% of E <sub>max</sub>	150				
<sup>*)</sup> at max. eccentricity	mm	160				
Lateral load limit (E <sub>lq</sub> ), static	%	300				
Breaking load (E <sub>d</sub> )	of E <sub>max</sub>	300				
Nominal (rated) displacement at E <sub>max</sub> (s <sub>nom</sub> ), approx.	mm	< 0.5				
Weight (G), approx.	kg	0.25				
Degree of protection acc. to EN 60 529 (IEC 529)		IP67				
Material: Measuring body		Aluminum				
Application protection		Silicone rubber				
Cable sheath		PVC				

1) According to OIMLR60 with P<sub>LC</sub> = 0.7

2) Max. eccentric loading according to OIML R76

3) The values for linearity deviation (d<sub>lin</sub>), relative reversibility error (d<sub>hy</sub>) and temperature effect on sensitivity (TK<sub>C</sub>) are recommended values. The sum of these values remain within the cumulated error limit acc. to OIML R60.

4) According to OIML R76.

## Specifications (continuation)

Type	PW2C...					
Accuracy class <sup>1)</sup>	C6, C6MR					
Maximum number of load cell intervals ( $n_{LC}$ )	6000					
Maximum capacity ( $E_{max}$ ) <sup>2)</sup>	kg	7.2	12	18	36	72
Minimum LC verification interval ( $v_{min}$ ), (Accuracy class C3)	g	0.5	1	2	5	10
Temperature effect on zero balance ( $TK_0$ ) (Accuracy class C6)	% of $C_n$ / 10 K	$\pm 0.0097$	$\pm 0.0116$	$\pm 0.0155$	$\pm 0.0194$	$\pm 0.0194$
Minimum LC verification interval ( $v_{min}$ ), (Accuracy class C6MR)	g	-	-	1	2	-
Temperature effect on zero balance ( $TK_0$ ) (Accuracy class C6MR)	% of $C_n$ / 10 K	-	-	$\pm 0.0070$	$\pm 0.0070$	-
Max. platform size	mm	380 x 380				
Sensitivity ( $C_n$ )	mV/V	$2.2 \pm 0.2$				
Zero signal		$0 \pm 0.12$				
Temperat. effect on sensitivity ( $TK_C$ ) <sup>3)</sup> in the temperature range +20 ... +40 °C [+68 ... +104 °F] -10 ... +20 °C [+14 ... +68 °F]	% of $C_n$ / 10 K	$\pm 0.0087$ $\pm 0.0058$				
Relative reversibility error ( $d_{hy}$ ) <sup>3)</sup>	% of $C_n$	$\pm 0.0083$				
Non-linearity ( $d_{lin}$ ) <sup>3)</sup>		$\pm 0.0083$				
Minimum dead load output return (MDLOR)		$\pm 0.0083$				
Off-center load error <sup>4)</sup>		$\pm 0.0116$				

1) According to OIMLR60 with  $P_{LC} = 0.7$

2) Max. eccentric loading according to OIML R76


3) The values for linearity deviation ( $d_{lin}$ ), relative reversibility error ( $d_{hy}$ ) and temperature effect on sensitivity ( $TK_C$ ) are recommended values. The sum of these values remain within the cumulated error limit acc. to OIML R60.

4) According to OIML R76.


For more specifications, see table PW2C, accuracy class C3, C3MR (page 2)

## Wiring code

Connection with 4 wire cable (cable length: 0.35 m)

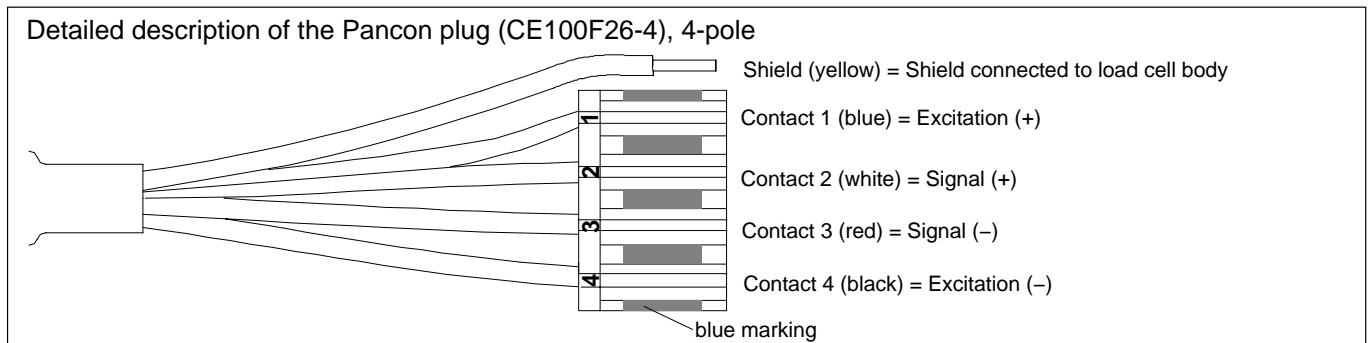

Connection with 6 wire cable (cable length, selectable: 0.35 m; 1.5 m; 3 m; 6 m)

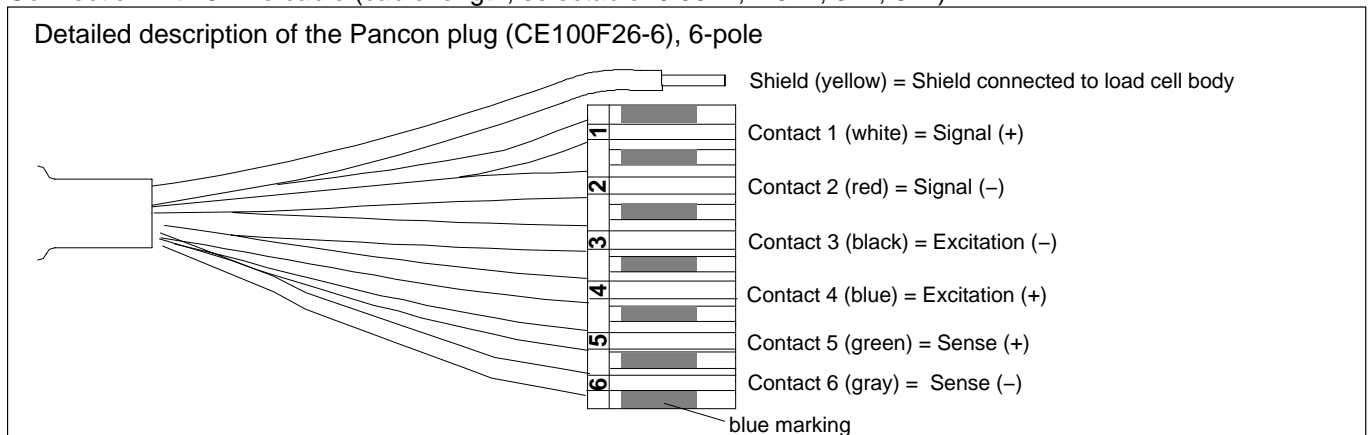

## Ordering codes

### PW2C... / K-PW2C-... \*)

Optimized for static weighing applications

#### PW2C... (Aluminum)

Type	PW2C	
Accuracy	C3-MR (OIML)	C6 / C6MR (OIML)
Note	Cable length 0.35m (4 wire)	Cable length 3m (6 wire)
Capacity	Order no.	Order no.
7.2kg	1-PW2CMR/7.2KG-1	-
12kg	1-PW2CMR/12KG-1	1-PW2CC6/12KG-1
18kg	1-PW2CMR/18KG-1	1-PW2CC6MR/18KG-1
36kg	1-PW2CMR/36KG-1	1-PW2CC6MR/36KG-1
72kg	1-PW2CMR/72KG-1	-

#### K-PW2C-... (Aluminum), optional versions

Order no.	
<b>K-PW2C</b>	
Code	Option 1: Mechanical version
<b>N</b>	-
Code	Option 2: Accuracy
<b>C3</b>	C3 (OIML)
<b>MR</b>	C3-MR (OIML)
<b>C6</b>	C6 (OIML)
Code	Option 3: Capacity
<b>7.2</b>	7.2kg
<b>12</b>	12kg
<b>18</b>	18kg
<b>36</b>	36kg
<b>72</b>	72kg
Code	Option 4: NN
<b>N</b>	-
Code	Option 5: Cable length
<b>4_0.35</b>	0.35m (4 wire)
<b>6_0.35</b>	0.35m (6 wire)
<b>6_1.5</b>	1.5m (6 wire)
<b>6_3</b>	3m (6 wire)
<b>6_6</b>	6m (6 wire)
Code	Option 6: Miscellaneous
<b>N</b>	without
<b>A</b>	2mV/V ±0.1% / 410 Ohms ±0.2 Ohms (aligned output, suitable for connection in parallel)
K-PW2C - <b>N</b> - [ ] - [ ] - [ ] - <b>N</b> - [ ] - [ ] - [ ] - [ ] - [ ]	

\*) Substituting PW2A... and PW2G...

Modifications reserved.

All details describe our products in general form only. They are not to be understood as express warranty and do not constitute any liability whatsoever.

**Hottinger Baldwin Messtechnik GmbH**

Im Tiefen See 45, D-64293 Darmstadt, Germany  
Tel.: +49 6151 803-0 Fax: +49 6151 803 9100  
Email: support@hbm.com Internet: www.hbm.com



measurement with confidence